


ALIMAK PL 1000

Material Hoist

EN 81-31 Compliant

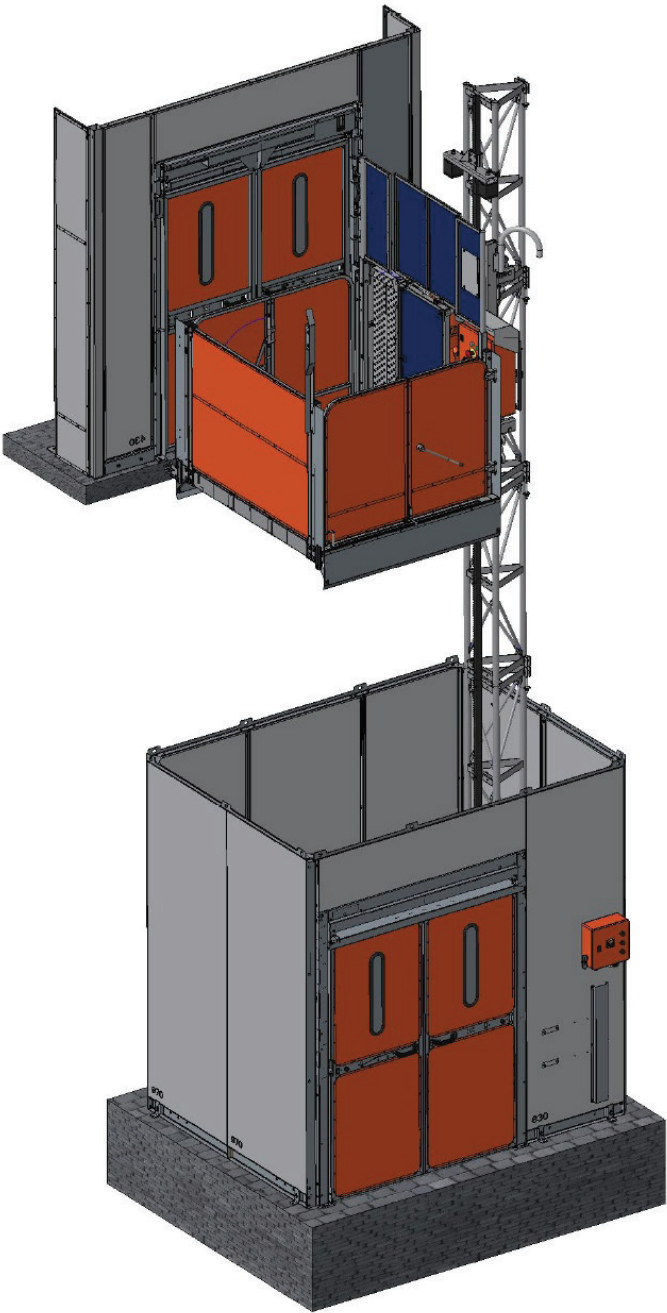


Technical Specifications

	PL 1000
Payload capacity	1000 kg
Lifting speed	12 m/min
Platform dimensions (WxL)	1.4 m x1.5 m
Max. lifting height, tied	12 m
Max. tie distance	7.5 m
Max. overhang	3 m
Max. first anchor position	6 m
Power supply	400V 50Hz 3Ph
Rated power	3.8 kW
Rated current	8.4 A
Power consumption	5.5 kVA
Type of mast	Triangular, 350 mm, tubular steel with integrated captive bolts


ALIMAK PL 1000

Main dimension

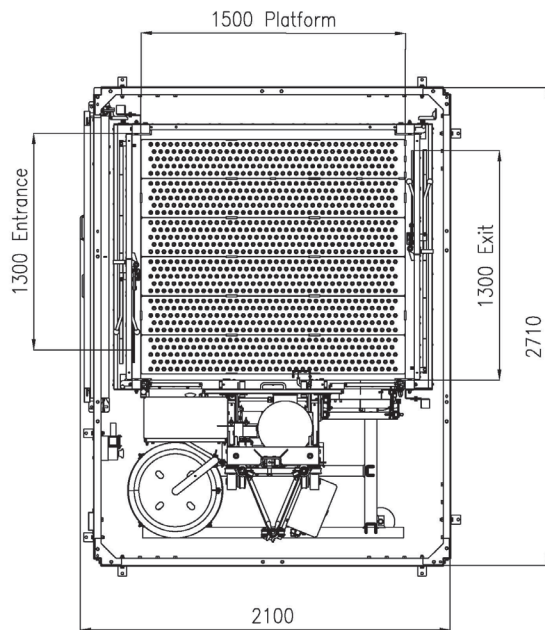

PL 1000	Weights
Base Unit	1000 kg
Mast	54 kg
Tie in	43 kg
Cable Guide	4 kg

Different alternative door system

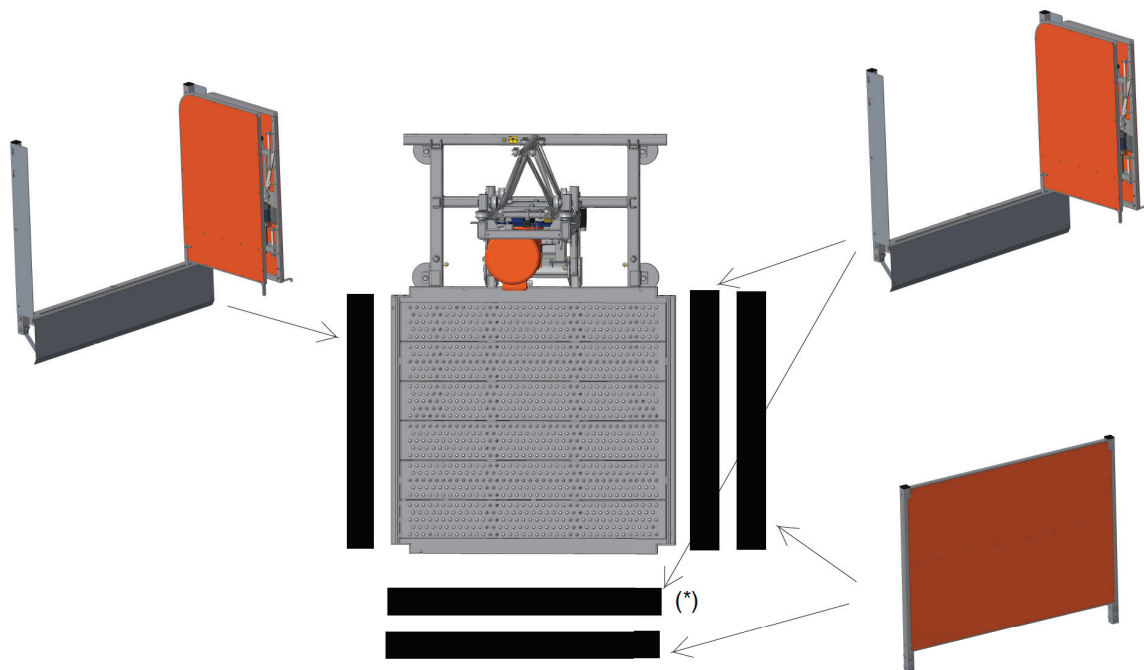

(*) Special configuration - Contact Alimak representative

www.alimak.com

ALIMAK

Pictures are illustrative only and do not necessarily show the configuration of products on the market at a given point in time. Products must be used in conformity with safe practice and applicable statutes, regulations, codes and ordinances. Specifications of products and equipment shown herein are subject to change without notice. Copyright © 2019 Alimak Group. All rights reserved. Alimak is a registered trademark of Alimak Group.